

**MAINTENANCE:** Wiley X lenses are specially coated to offer superior abrasion resistance. Please follow below instructions to prolong the life of your lenses and keep them performing at their best:

- Clean lenses with water only.
- Do not use solvents or special cleaners.
- Use micro-fiber cleaning cloth provided to gently wipe clean.
- Never use paper products to clean and avoid wiping lens surface when dry and/or dirty as this may potentially scratch the lens.

**WARNING:** Wiley X brand eyewear is tested tough. However, impact resistant eyewear is not unbreakable and does not provide unlimited eye protection under all circumstances and conditions. Misused, abused, scratched and/or damaged eyewear can reduce impact protection (and void your limited warranty). Dirty and/or wet eyewear can impair vision and reduce safety (resulting in personal injury and/or property damage). Keep your Wiley X eyewear clean with water only. Do not use solvents or abrasives as it could scratch or damage the product reducing its effectiveness. Store your Wiley X eyewear in the protective case provided to prolong the life of the lenses. Most of all, take all appropriate precautions when wearing your Wiley X eyewear during hazardous and/or dangerous activities and conditions. Wiley X, Inc. is not responsible for personal injury, property damage or losses incurred while using Wiley X brand products.



# WX VALOR INSTRUCTIONS



**WILEY X INC: 1.800.776.7842 // 925.243.9810 // WILEYX.COM**

7800 PATTERSON PASS ROAD, LIVERMORE CA 94550 USA

**WX EMEA LLC: +45 96 93 00 45 // WILEYX.EU**


SØNDERGADE 8-10 7570 VEMB DENMARK

ERX-ICVALOR(3)

**COPYRIGHT © 2017 WILEY X, INC. ALL RIGHTS RESERVED.**


WILEY X, WX, BLACK OPS, logos, tag lines and product names are trademarks or registered trademarks (marcas registradas) of Wiley X, Inc. in the U.S. and other countries. Logos © 2007-2017 Wiley X, Inc. All rights reserved.

## LENS REMOVAL

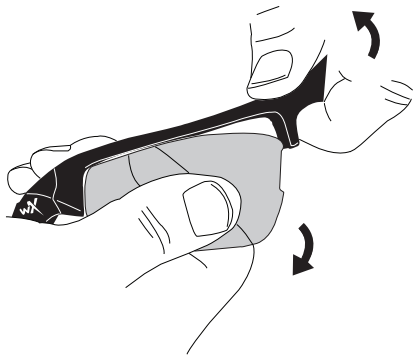

Place hands as pictured and release lens near nose piece, then pull out of frame.

## LENS INSTALLATION

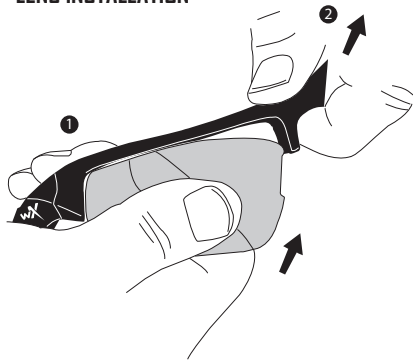

- 1) Insert temple edge of lens into frame at the temple.
- 2) Stress frame as pictured and rotate lens fully into groove of frame at nose bridge.